

# **— SPX MAINTENANCE PLATFORM —**




**— LIFT-A-LOFT —**

*An Industry Leader for 50 Years*

# SPX MAINTENANCE PLATFORM

<b>Model SPX32</b>	<b>Min Platform Height</b>	<b>53" (1.34m)</b>
<b>Platform Capacity (Std) – 4000 lbs (1814 kg)</b>	<b>Travel Height</b>	<b>95" (2.41m)</b>
<b>Working Height to 32 Ft 7 In (9.93 m)</b>	<b>Gross Weight w/Battery</b>	<b>11,200 lbs(5080 kg)</b>

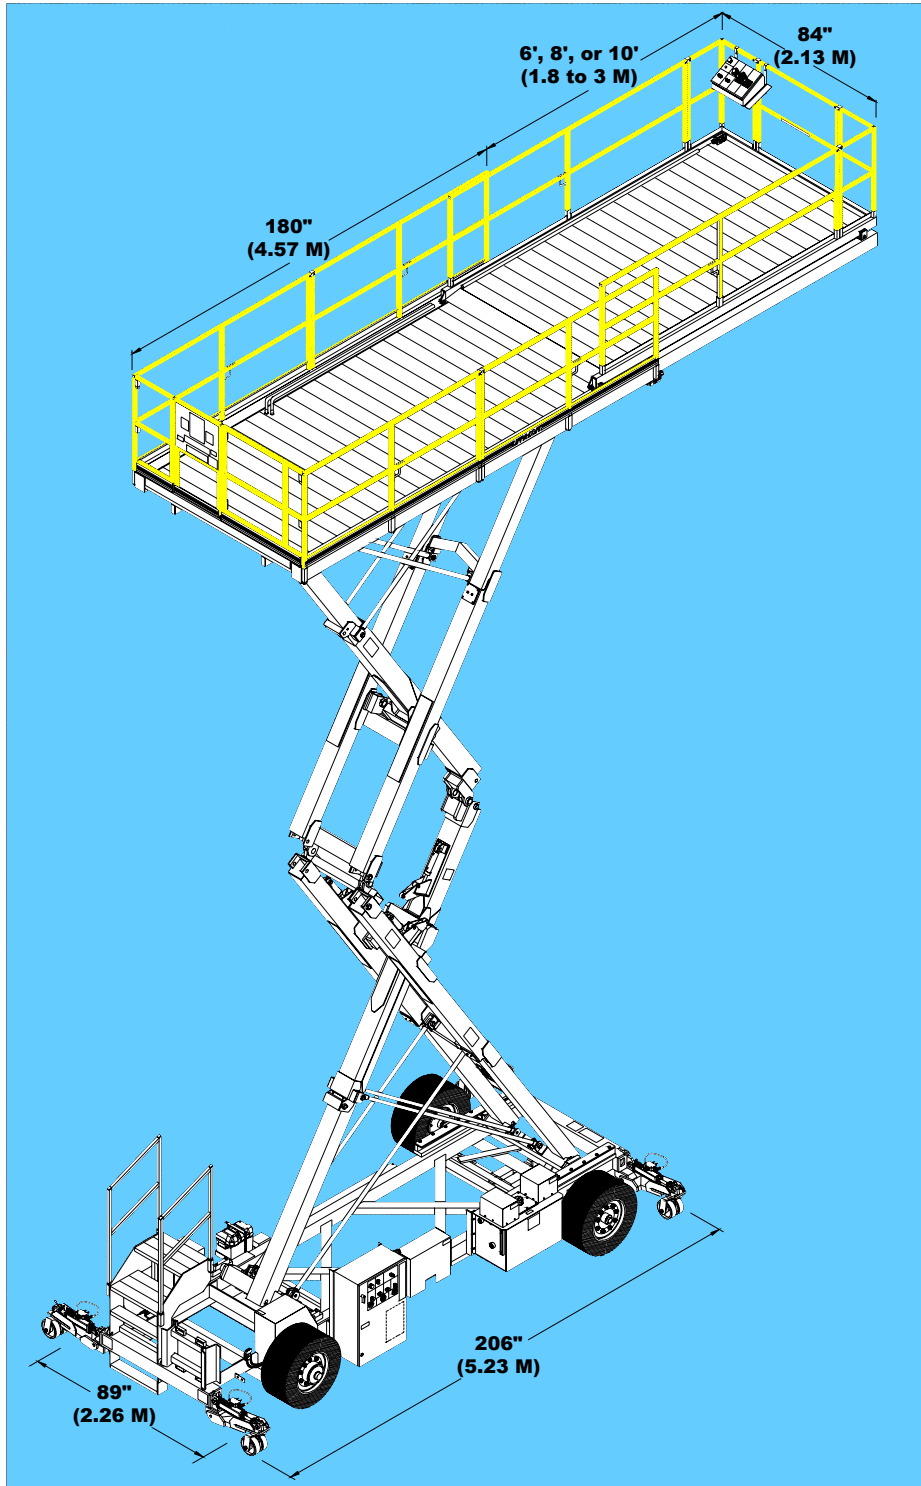

## Performance Data (Average)

### Travel Speed (Variable & Controllable)

- High Speed – 2.4 mph (3.9 km/hr)
- Elevated – 0.68 mph (1.13km/hr)
- Gradeability – 10%
- Telescoping Scissor Design Provides Maximum Stability at Full Elevation
- Platform Lift Speed – 0.42 ft/sec (0.13 m/sec)
- Platform Lower Speed – 0.63 ft/sec (0.19 m/sec)
- Main Platform Capacity 4,000 lbs (1814 kg)
- Extenda-deck Capacity 1,000 lbs (453.6 kg)

## Options

- 6', 8, or 10' (1.83, 2.44, or 3.05m) Power Deck Extension (Extenda-Deck)
- All Motion Alarm
- Flashing or Rotating Light
- 36VDC Power
- Gasoline Engine
- Diesel Engine
- Hydraulic Stabilizers
- Split "V" Deck Design
- Aircraft Bumpers
- Padded Rails
- Adjustable Work Lights
- Extreme Cold Weather Package
- Contact *LIFT-A-LOFT* for Custom Designs

## Safety

- Brakes Spring Applied, Pressure Released
- Deadman Controls
- Anti-slip Work Surface
- Holding Valves on Lift Cylinders
- Emergency Stop Switch (all control stations)
- Lanyard Attachments

# **LIFT-A-LOFT**